

TR-Sensor

2024 PRODUCT CATALOG

SHENZHEN TRIS INTELLIGENT & TECHNOLOGY CO.,LTD.



深圳市腾日智能科技有限公司

SHENZHEN TRIS INTELLIGENT & TECHNOLOGY CO.,LTD.

www.sztris.com

Product catalog

Microwave Sensor 03

Infrared Motion Sensor 10

Light-control Sensor 17

LED Ceiling Lamp 19

SHENZHEN TRIS Electric Co., Ltd. is a professional manufacturer of electronic products in the induction class manufacturers, with more than ten years of experience in electronics manufacturing. Products covered: microwave sensor switch, PIR sensor switch, sensor light, wireless remote control, light control switch, solar lamps, garden lights, lawn lights. Product categories were CE, GS, UL, VDE certification. Products are exported to Europe, America, Southeast Asia and other countries, has won praise at home and abroad users.


The company is located in Ninghai Country. The company covers an area of 7000 square meters, construction area of 3,000 square meters. Production from the mold, injection molding, circuit board production, assembly, and to undertake electronic products OEM, ODM processing. In recent years, the increasing scale of production companies, new companies have advanced production process equipment and testing equipment, now has a fully automated SMT, automated production lines, and another mold processing equipment, laser marking machine, the company has obtained ISO14001 international quality management system certification.

The company of "innovation, continuous improvement, first-class brand," the purpose of continuing to promote technological innovation and product quality and innovation, in order to better serve our customers with high quality products. Always waiting for you!



APPLICATION

The serie of microwave sensor:
 generally used for controlling LED lamps,
 they are widely used in parking garage,
 the corridor,home or the public
 washroom,
 the bedroom and so on.
The characteristics of products:
 environmental protection and energy
 saving,
 convenient adjustment,
 and the function mode can be adjusted
 according to the users individual demand.

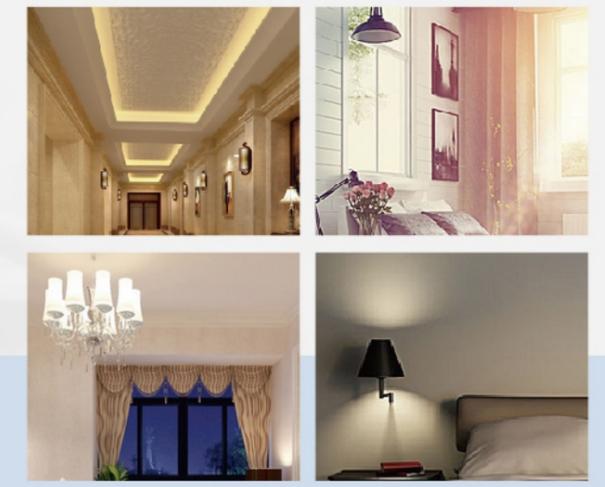

TR-Y01



TR-D05



TR-PIR15



TR-PIR13



TR-LUX08



TR-LUX06




TR-Y01-D

Detection:360°
 Voltage:110-130V/AC 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 400W(110V)/800W(220V) ☼
 150W(110V)/300W(220V) ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light: <3-2000LUX(adjustable)
 Installing Height:2-6m




TR-Y01

Detection:360°
 Voltage: 110-130V/AC 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 600W(110V)/1200W(220V) ☼
 200W(110V)/600W(220V) ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light: <3-2000(adjustable)
 Installing Height:2-6m

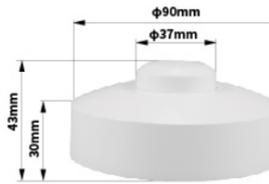


TR-Y01-V05

Detection:360°
 Voltage: 110-130V/AC 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 600W(110V)/1200W(220V) ☼
 200W(110V)/600W(220V) ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light: <3-2000(adjustable)
 Installing Height:2-6m



TR-Y01-D04

Detection:360°
 Voltage: 110-130V/AC 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.:600W(110V)/1200W(220V) ☼
 200W(110V)/600W(220V) ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light: <3-2000(adjustable)
 Installing Height:2-6m



TR-D05

Detection:360°
 Voltage: 110-130V/AC220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.:600W(110V)/1200W(220V) ☼
 200W(110V)/600W(220V) ⚡
 Detection Distance: 2-10m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light: <3-2000(adjustable)
 Installing Height:2-6m




TR-D13

Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 1200W ☼
 600W ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light: <3-2000(adjustable)
 Installing Height:2-6m



TR-Y04

Detection:360°
 Voltage: 110-130V/AC 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 600W(110V)/1200W(220V) ☼
 200W(110V)/600W(220V) ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light: <3-2000(adjustable)
 Installing Height:2-6m

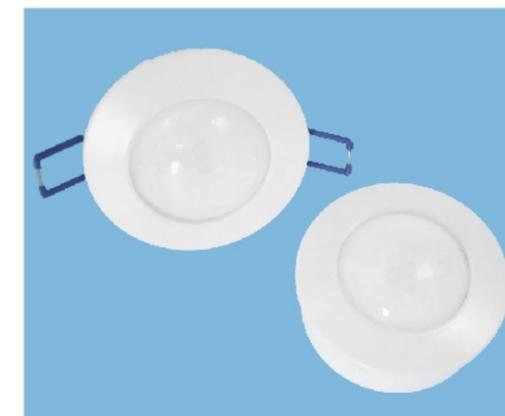

TR-Y06

Detection:360°
 Voltage: 110-130V/AC 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 400W(110V)/800W(220V) ☼
 150W(110V)/400W(220V) ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light: <3-2000(adjustable)
 Installing Height:2-6m



TR-IP65


Detection:360°
 Voltage: 110-130V/AC 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 600W(110V)/1200W(220V) ☼
 200W(110V)/600W(220V) ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light: 3-2000LUX(adjustable)
 Installing Height:2-6m





TR-D01

Detection:360°
 Voltage:110-130V/AC 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 800W(110V)/1200W(220V) ☀
 200W(110V)/600W(220V) ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 30min±1min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2-6m




TR-D02

Detection:360°
 Voltage: 110-130V/AC 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 600W(110V)/1200W(220V) ☀
 200W(110V)/600W(220V) ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 30min±1min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2-6m



TR-D03

Detection:360°
 Voltage: 110-130V/AC 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 600W(110V)/1200W(220V) ☀
 200W(110V)/600W(220V) ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 30min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-6m




TR-D04

Detection:360°
 Voltage: 110-130V/AC 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 600W(110V)/1200W(220V) ☀
 200W(110V)/600W(220V) ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 30min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-6m




TR-D08

Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 800W ☀
 400W ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-6m



TR-D09

Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.:100W
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-6m




TR-D11

Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 800W ☀
 400W ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-6m



TR-D11P

Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.:800W ☀
 400W ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-6m

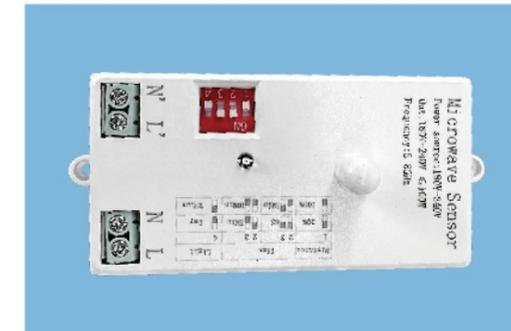

TR-Y06

Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.:100W
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-6m



TR-L06

Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.:100W
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-6m





TR-L01

Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 800W ☀
 400W ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-6m




TR-L02

Voltage: 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 800W ☀
 400W ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-6m





TR-L03

Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 800W ☀
 400W ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2-6m




TR-L04

Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 800W ☀
 400W ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2-6m

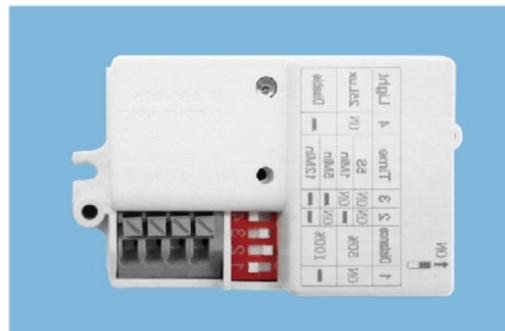

TR-L05

Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.:100W
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2-6m



TR-D06

Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 800W ☀
 400W ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:3-2000LUX(adjustable)
 Installing Height:2-6m




TR-D07

Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 800W ☀
 400W ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:3-2000LUX(adjustable)
 Installing Height:2-6m



TR-V03

Detection:360°
 Voltage: 110-130V/AC 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 600W(110V)/1200W(220V) ☀
 200W(110V)/600W(220V) ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:3-2000LUX(adjustable)
 Installing Height:2-6m

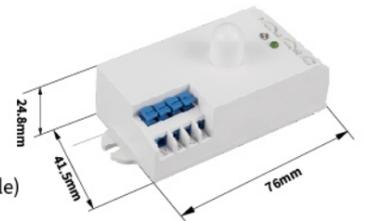


TR-V04

Detection:360°
 Voltage: 110-130V/AC 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 600W(110V)/1200W(220V) ☀
 200W(110V)/600W(220V) ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:3-2000LUX(adjustable)
 Installing Height:2-6m



TR-V05

Detection:360°
 Voltage: 110-130V/AC 220-240V/AC 50/60Hz
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 600W(110V)/1200W(220V) ☀
 200W(110V)/600W(220V) ⚡
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:3-2000LUX(adjustable)
 Installing Height:2-6m






TR-V05-L

Detection:360°
 Voltage: 12-36V/DC
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 5A
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:3-2000LUX(adjustable)
 Installing Height:2-6m




TR-P02

Detection:360°
 Voltage: 12-40V/DC
 HF System: 5.8GHz CW radar, ISM band
 RatedLoad:Max.: 5A PWM
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 10sec±1sec to 10min±1min(adjustable)
 Ambient Light:3-2000LUX(adjustable)
 Installing Height:2-6m



TR-P03

Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 Output Power:27V 500mA
 HF System: 5.8GHz CW radar, ISM band
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 10sec±1sec to 10min±1min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2-6m



TR-Y03

Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 Output Power:27V 500mA
 HF System: 5.8GHz CW radar, ISM band
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 10sec±1sec to 10min±1min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2-6m



TR-PIR11

Detection Angle:360°
 Voltage:100-240V/AC 50/60Hz
 RatedLoad:Max.: 800W(110V)/1200W(220V) ☀
 200W(110V)/600W(220V) ☾☽
 Detection Distance: Max.6m(<24°C)
 Time Delay: 10s-30s-90s-5min-10min-30min(adjustable)
 Ambient Light:1<10-500LUX(adjustable)
 Installing Height:2.5-3.5m



TR-PIR11A

Detection Angle:360°
 Voltage:12-24V/DC
 RatedLoad:Max.:5A
 Detection Distance: Max.6m(<24°C)
 Time Delay: 10s-30s-90s-5min-10min-30min(adjustable)
 Ambient Light:1<10-500LUX(adjustable)
 Installing Height:2.5-3.5m




TR-PIR12

Detection Angle:360°
 Voltage:100-240V/AC 50/60Hz
 RatedLoad:Max.: 800W(110V)/1200W(220V) ☀
 200W(110V)/600W(220V) ☾☽
 Detection Distance: Max.6m(<24°C)
 Time Delay: 10s-30s-90s-5min-10min-30min(adjustable)
 Ambient Light:<10-500LUX(adjustable)
 Installing Height:2.5-3.5m



TR-PIR13

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.: 1200W ☀
 600W ☾☽
 Detection Distance: Max.8m(<24°C)
 Time Delay: 10s-30s-90s-5min-10min-30min(adjustable)
 Ambient Light:<10-500LUX(adjustable)
 Installing Height:2.5-5m

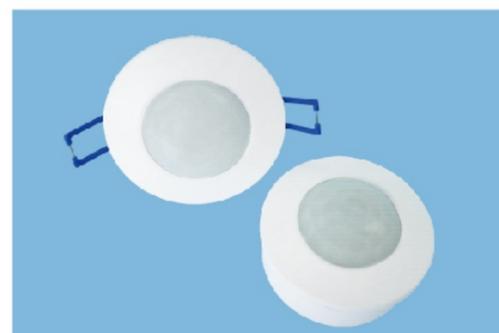

TR-PIR13A


Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.: 1200W ☀
 600W ☾☽
 Detection Distance: Max.8m(<24°C)
 Time Delay: 10s-30s-90s-5min-10min-30min(adjustable)
 Ambient Light:<10-500LUX(adjustable)
 Installing Height:2.5-3.5m
 IP65





TR-PIR14

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.: 1200W ⚡
 600W ⚡
 Detection Distance: Max.12m(<24°C)
 Time Delay: 10s-30s-90s-3min-7min-15min(adjustable)
 Ambient Light:<10-500LUX(adjustable)
 Installing Height:2.5-3.5m
 IP65



TR-PIR15

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.: 1200W ⚡
 600W ⚡
 Detection Distance: Max.8m(<24°C)
 Time Delay: 10s-30s-90s-5min-10min-30min(adjustable)
 Ambient Light:<10-500LUX(adjustable)
 Installing Height:2.5-3.5m



TR-PIR16

Detection Angle:360°
 Voltage:100-240V/AC 50/60Hz
 RatedLoad:Max.: 60W
 Detection Distance: Max.6m(<24°C)
 Time Delay: 10s-5min(adjustable)
 Ambient Light:<10-500LUX(adjustable)
 Installing Height:2.5-3.5m



TR-PIR17

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.: 800W ⚡
 400W ⚡
 Detection Distance: Max.6m(<24°C)
 Time Delay: 10s-30s-90s-3min-7min-15min(adjustable)
 Ambient Light:<10-500LUX(adjustable)
 Installing Height:2.5-3.5m



TR-PIR18

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.: 1200W ⚡
 600W ⚡
 Detection Distance: Max.12m(<24°C)
 Time Delay: 10s-30s-90s-3min-7min-15min(adjustable)
 Ambient Light:<10-500LUX(adjustable)
 Installing Height:2.5-3.5m




TR-PIR19

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.: 1200W ⚡
 600W ⚡
 Detection Distance: Max.8m(<24°C)
 Time Delay: 10s-30s-90s-3min-7min-15min(adjustable)
 Ambient Light:<10-500LUX(adjustable)
 Installing Height:2.5-3.5m




TR-PIR20

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.: 1200W ⚡
 600W ⚡
 Detection Distance: Max.8m(<24°C)
 Time Delay: 10s-30s-90s-3min-7min-15min(adjustable)
 Ambient Light:<10-500LUX(adjustable)
 Installing Height:2.5-3.5m



TR-PIR21

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.: 1200W ⚡
 600W ⚡
 Detection Distance: Max.8m(<24°C)
 Time Delay: 10s-30s-90s-3min-7min-15min(adjustable)
 Ambient Light:<10-500LUX(adjustable)
 Installing Height:2.5-3.5m



TR-PIR22


Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.: 1200W ⚡
 600W ⚡
 Detection Distance: Max.12m(<24°C)
 Time Delay: 10s-30s-90s-3min-7min-15min(adjustable)
 Ambient Light:<10-500LUX(adjustable)
 Installing Height:2.5-3.5m






TR-PIR02

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.6m(<24°C)
 Time Delay: 10s-10min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m




TR-PIR02A

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.6m(<24°C)
 Time Delay: 10s-10min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m




TR-PIR02B

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.6m(<24°C)
 Time Delay: 10s-10min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m





TR-PIR05

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.6m(<24°C)
 Time Delay: 10s-10min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m




TR-PIR10

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.6m(<24°C)
 Time Delay: 10s-10min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m

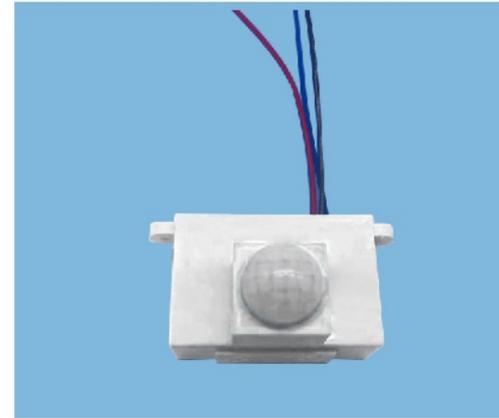


TR-19

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.6m(<24°C)
 Time Delay: 10s-5min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m



TR-Y02

Detection Angle:360°
 Voltage:110-240V/AC 50/60Hz
 RatedLoad:Max.:200W(110V)/800W(220V) ⚡
 100W(110V)/400W(220V) ⚡
 Detection Distance: Max.6m(<24°C)
 Time Delay: 5s-12min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m

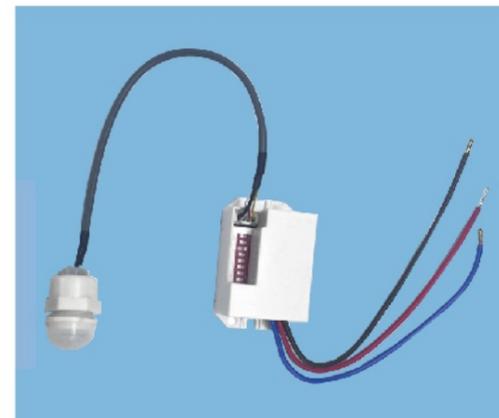

TR-Y02A


Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:800W ⚡
 400W ⚡
 Detection Distance: Max.6m(<24°C)
 Time Delay: 5s-12min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m






TR-P001

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.10m(<24°C)
 Time Delay: 10s-10min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m




TR-P002

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.10m(<24°C)
 Time Delay: 10s-10min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m




TR-P003

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.10m(<24°C)
 Time Delay: 10s-10min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m




TR-P004

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.10m(<24°C)
 Time Delay: 10s-10min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m




TR-P005

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.10m(<24°C)
 Time Delay: 10s-10min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m




TR-P006

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.10m(<24°C)
 Time Delay: 10s-10min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m





TR-P007

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.10m(<24°C)
 Time Delay: 10s-10min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m




TR-P008

Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.10m(<24°C)
 Time Delay: 10s-10min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m

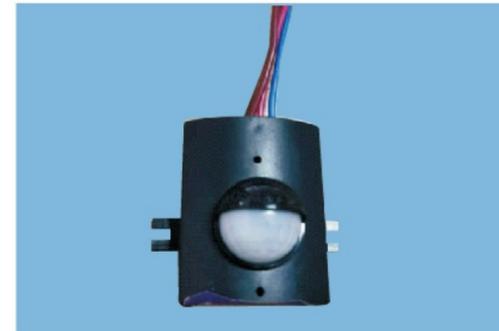


TR-P009


Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.10m(<24°C)
 Time Delay: 10s-10min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m



TR-P010


Detection Angle:360°
 Voltage:220-240V/AC 50/60Hz
 RatedLoad:Max.:100W
 Detection Distance: Max.10m(<24°C)
 Time Delay: 10s-10min(adjustable)
 Ambient Light:<3-2000LUX(adjustable)
 Installing Height:2.5-3.5m



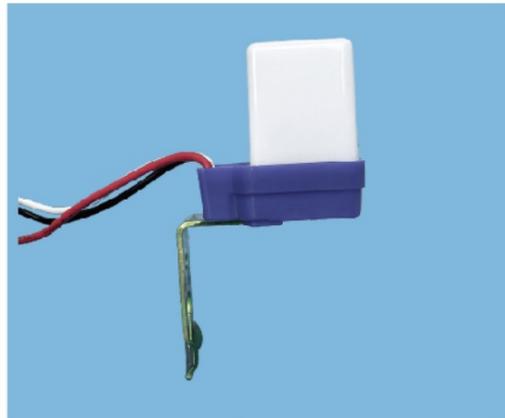

TR-LUX01

Voltage:110-240V/AC
 Power Frequency: 50/60Hz
 Rated Current: 10A
 Ambient Light:1<5-15LUX
 IP44





TR-LUX02

Voltage:110-240V/AC
 Power Frequency: 50/60Hz
 Rated Current: 16A
 Ambient Light:1<5-15LUX(adjustable)
 IP44




TR-LUX03

Voltage:110-240V/AC
 Power Frequency: 50/60Hz
 Rated Current: 25A
 Ambient Light:1<5-15LUX (adjustable)
 IP44

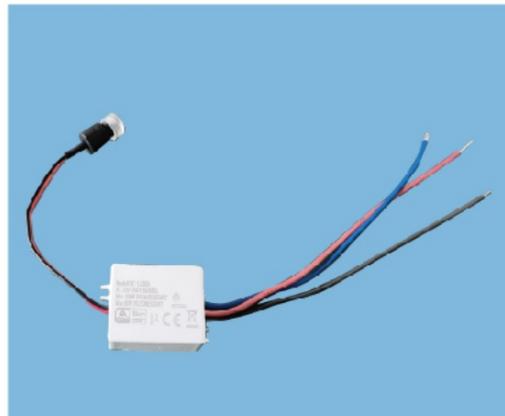

TR-LUX05

Voltage:220-240V/AC
 Power Frequency: 50/60Hz
 Rated Current: 100w
 Ambient Light:1<25LUX



TR-LUX06

Voltage:220-240V/AC
 Power Frequency: 50/60Hz
 Rated Current:10A
 Ambient Light:1<5-15LUX (adjustable)
 IP44



TR-LUX07

Voltage:220-240V/AC
 Power Frequency: 50/60Hz
 Rated Current:10A
 Ambient Light:1<5-15LUX (adjustable)
 IP44



TR-LUX08

Voltage:110-240V/AC
 Power Frequency: 50/60Hz
 Rated Current: 25A
 Ambient Light:1<5-15LUX (adjustable)
 IP65




TR-LUX09

Voltage:110-240V/AC
 Power Frequency: 50/60Hz
 Rated Current: 25A
 Ambient Light:1<5-15LUX (adjustable)
 IP65





TR-130
 Voltage: 220-240V/AC 50/60Hz
 Rated load:12W(1200LM)



TR-100
 Voltage: 220-240V/AC 50/60Hz
 Rated load:12W(1200LM)




TR-100A
 Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-6m
 Rated load:12W(1200LM)




TR-100B
 Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 Detection Distance: 1-8m(radii),adjustable
 Time Delay: 8sec±1sec to 12min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-6m
 Rated load:12W(1200LM)




TR-Y96
 Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 Detection Distance: 3-10m(radii),adjustable
 Time Delay: 10sec±1sec to 10min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-6m
 Rated load:16W(1600LM)

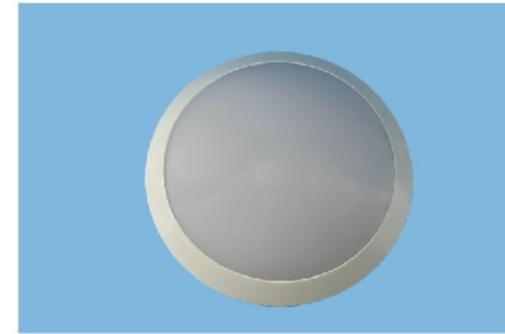



TR-135
 Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 Detection Distance: 3-10m(radii),adjustable
 Time Delay: 10sec±1sec to 10min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-6m
 Rated load:14W(1500LM)




TR-138D
 Voltage: 220-240V/AC 50/60Hz
 Rated load:12W(1200LM)




TR-139D
 Voltage: 220-240V/AC 50/60Hz
 Rated load:18W(2000LM)

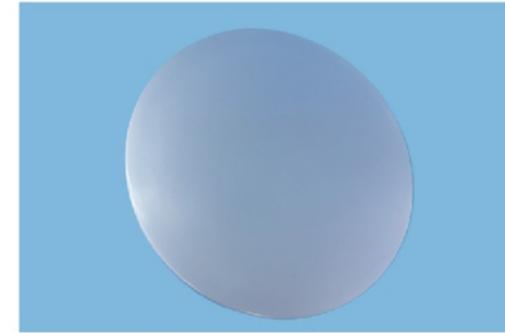

TR-P001
 Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 Detection Distance: 1-6m(radii),adjustable
 Time Delay: 5sec±1sec to 3min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-4m
 Rated load:12W(1250LM)




TR-P002
 Detection:360°
 Voltage: 220-240V/AC 50/60Hz
 Detection Distance: 1-6m(radii),adjustable
 Time Delay: 5sec±1sec to 3min±1min(adjustable)
 Ambient Light:<3-2000(adjustable)
 Installing Height:2-4m
 Rated load:18W(1800LM)






TR-P003

Detection:360°
Voltage: 220-240V/AC 50/60Hz
Detection Distance: 1-6m(radii),adjustable
Time Delay: 5sec±1sec to 3min±1min(adjustable)
Ambient Light:<3-2000(adjustable)
Installing Height:2-4m
Rated load:18W(1800LM)

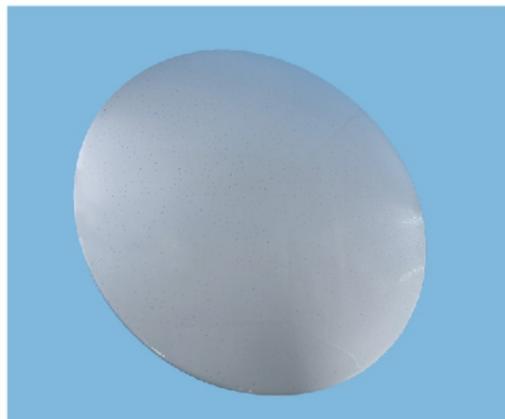


TR-P004

Detection:360°
Voltage: 220-240V/AC 50/60Hz
Detection Distance: 1-6m(radii),adjustable
Time Delay: 5sec±1sec to 3min±1min(adjustable)
Ambient Light:<3-2000(adjustable)
Installing Height:2-4m
Rated load:12W(1250LM)

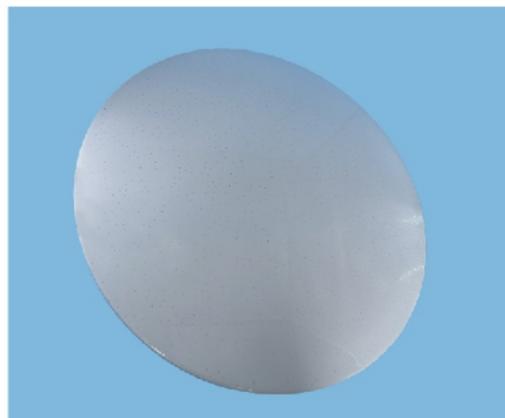

TR-P005

Detection:360°
Voltage: 220-240V/AC 50/60Hz
Detection Distance: 1-6m(radii),adjustable
Time Delay: 5sec±1sec to 3min±1min(adjustable)
Ambient Light:<3-2000(adjustable)
Installing Height:2-4m
Rated load:18W(1800LM)



TR-P006

Detection:360°
Voltage: 220-240V/AC 50/60Hz
Detection Distance: 1-6m(radii),adjustable
Time Delay: 5sec±1sec to 3min±1min(adjustable)
Ambient Light:<3-2000(adjustable)
Installing Height:2-4m
Rated load:36W(4600LM)



Area with horizontal dashed lines for notes.

